




INSTALLATION INSTRUCTIONS ANGLE RINGS For 2 1/16" and 2 5/8" Gauges and Gauge Panels MODELS 2234, 3244



In-Dash Installation


1. Angle Rings (Model 2234) are designed to mount 2 1/16" gauges in a 2 1/8" diameter hole. Angle Rings (Model 3244) are designed to mount 2 5/8" gauges in a 2 23/32" diameter hole. These hole sizes allow the gauge to be positioned in any orientation. The hole may be either a hole in the dash or a gauge panel.
2. Attach gauge wiring connections before mounting gauge into mounting hole.
3. Secure the gauge in the hole using the mounting brackets, nuts and lock washers provided. All installations will require that the brackets be modified for the final chosen viewing angle of the gauge and angle ring. For details, see mounting bracket modification instructions below.

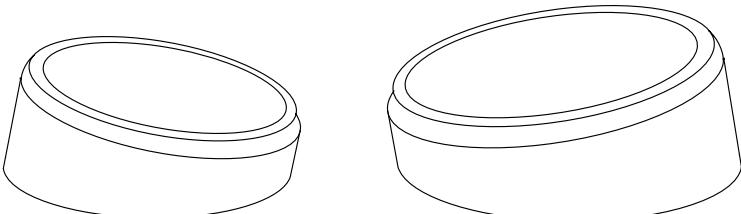


In-Panel Installation

When mounting angle rings into one of Auto Meter's Gauge Panels (Models 2236, 2237, 2238, 3231, 3232, or 3233), the panel will need to be modified to allow the gauges and angle rings to fit properly.

1. Widen the hole openings on the gauge panels. This will allow the gauges to be inserted at an angle. The modifications shown to the right will allow the gauges to be angled left, right, up or down. The area of the gauge panels that need to be removed will depend on the final viewing angle.
2. Modify brackets, (for details, refer to next page). All installations will require bracket modification for final fit.
3. Secure the gauge in it's hole using the mounting brackets, nuts and lock washers provided.



Remove these areas
if gauges tilt LEFT/RIGHT



Remove these areas
if gauges tilt UP/DOWN

SERVICE

For service send your product to Auto Meter in a well packed shipping carton. Please include a note explaining what the problem is along with your phone number. Please specify when you need the product back. If you need it back immediately mark the outside of the box "RUSH REPAIR," and Auto Meter will service product within two days after receiving it. (\$10.00 charge will be added to the cost of "RUSH REPAIR.") If you are sending product back for Warranty adjustment, you must include a copy (or original) of your sales receipt from the place of purchase.


12 MONTH LIMITED WARRANTY

Auto Meter Products, Inc. warrants to the consumer that all Auto Meter High Performance products will be free from defects in material and workmanship for a period of twelve (12) months from date of the original purchase. Products that fail within this 12 month warranty period will be repaired or replaced at Auto Meter's option to the consumer, when it is determined by Auto Meter Products, Inc. that the product failed due to defects in material or workmanship. This warranty is limited to the repair or replacement of parts in the Auto Meter instruments. In no event shall this warranty exceed the original purchase price of the Auto Meter instruments nor shall Auto Meter Products, Inc. be responsible for special, incidental or consequential damages or costs incurred due to the failure of this product. Warranty claims to Auto Meter must be transportation prepaid and accompanied with dated proof of purchase. This warranty applies only to the original purchaser of product and is non-transferable. All implied warranties shall be limited in duration to the said 12 month warranty period. Breaking the instrument seal, improper use or installation, accident, water damage, abuse, unauthorized repairs or alterations voids this warranty. Auto Meter Products, Inc. disclaims any liability for consequential damages due to breach of any written or implied warranty on all products manufactured by Auto Meter.


FOR SERVICE SEND TO: AUTO METER PRODUCTS, INC. 413 W. Elm St., Sycamore, IL 60178 USA (815) 899-0801

Mounting Bracket Modifications

In order to install the angle ring the mounting bracket needs to be altered. How it is altered depends on the direction the gauge is intended to face. In order for the gauge to be tilted up or down, the legs of the bracket must be cut at an angle (Fig. 1). For a left or right tilt, the legs of the bracket must be cut straight, with one side shorter than the other (Fig. 2). Use templates provided below for accurate alterations.

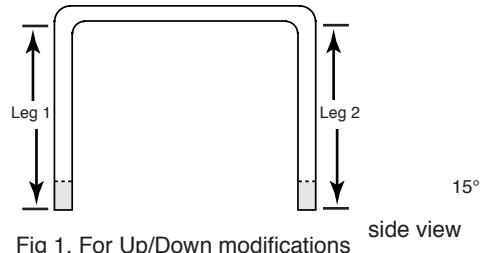

Bracket Type	Leg 1 Height	Leg 2 Height
2 5/8"	1.12"	1.12"
2 1/16"	1.16"	1.16"

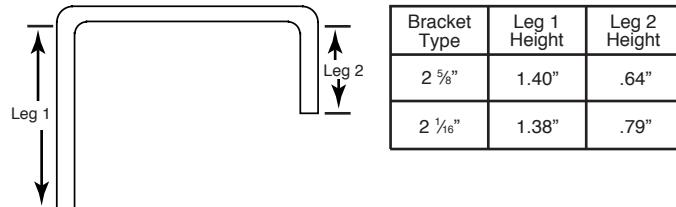

Bracket Type	Leg 1 Height	Leg 2 Height
2 5/8"	1.40"	.64"
2 1/16"	1.38"	.79"

Using Bracket Templates

2 1/16" GAUGES


(A)



(B)




(C)




2 5/8" GAUGES *

(D)



(E)



(F)



1. Carefully cut out the template needed and lay it face up on a hard surface. It is suggested to make a copy of this page in order to keep the original template.
2. Place the bracket on the template, being sure to line up the holes on the bracket with the circles on the template.
3. Lift up the ends of the template and mark the bracket where the template ends with a fine point marker or scribe.
4. Cut bracket as needed.

NOTE: Consider the dashboard or panel thickness when measuring brackets.

For 2-1/16" gauges:

- Use template A to tilt the gauge up or down and 45° to the left or right.
- Use template B to tilt the gauge straight up or down.
- Use template C to tilt the gauge to the left or right.

For 2-5/8" gauges:

- Use template D to tilt the gauge up or down and 45° to the left or right.
- Use template E to tilt the gauge straight up or down.
- Use template F to tilt the gauge to the left or right.

***NOTE:** For the 2-5/8" gauges be sure to correctly line up the grooves in the center of the bracket, taking note of whether you want it tilted up or down.