

INSTALLATION
INSTRUCTIONS
2650-1316-00 Rev. A



Model:
AB10K
Includes: 10 oz. Bottle,
Valve, Adj. Regulator
& 10ft. 1/4" od tubing.

INSTALLATION


413 West Elm Street • Sycamore, IL 60178
(866)248-6357 • (815)895-6786
www.autometer.com • service@autometer.com

VALVE INSTRUCTIONS: Please read the instructions enclosed with the bottle for proper valve insertion.

REGULATOR INSTALLATION: With the bottle mounted securely in the car, attach the regulator and tighten the nut snug by hand and then with a wrench. The regulator uses a special o-ring called a quad-ring to seal the valve and does not need to be over tightened.

AIR LINE INSTALLATION The regulator uses a quick disconnect air line fitting. To install the air line simply push the line in to the fitting until seated, a quick tug on the line will ensure that it has been properly locked in place. To remove the air line, push up on the plastic lock ring and pull down on the air line. NOTE: With a quick disconnect style fitting a tubing insert is not required.

BOTTLE FILLING PROCEDURE: This bottle should be filled with 10 ounces of Liquid Carbon Dioxide, the same liquid CO₂ that is used to dispense soda and beer (see industrial Gases in the Yellow Pages), and is used in fire extinguishers, and CO₂ "Paintball" guns (see Sporting Goods or Paintball in the Yellow Pages) Make sure you specify LIQUID CO₂. Prices may vary from \$1.50 - \$10.00 depending on where you have it filled. Be sure the bottle is filled correctly and is approximately 10 oz. heavier after it has been filled. Liquid CO₂ pressure will vary greatly with the outside temperature. At 40° F it will be about 500 PSI, at 72 °F about 875 PSI, and at 100°F it could be as high as 1500 - 2000 PSI. If the pressure drops below 300 PSI at about 70°F, you should weigh the bottle to see if it needs to be filled. **DO NOT OVER FILL THE BOTTLE!** This could cause safety pop off disc rupture as the bottle pressure increases when exposed to sunlight/heat. The high quality pressure regulator supplied in the kit insures that the regulated pressure remains stable no matter what the bottle pressure is. Should the bottle become over pressurized, the safety pop off disc on the bottle valve will rupture. These discs are available through local welding supply shop and should be installed by trained personnel in accordance with Federal Regulations and Guidelines. Dedenbear also stocks these disks under the part number: p/n ABVS

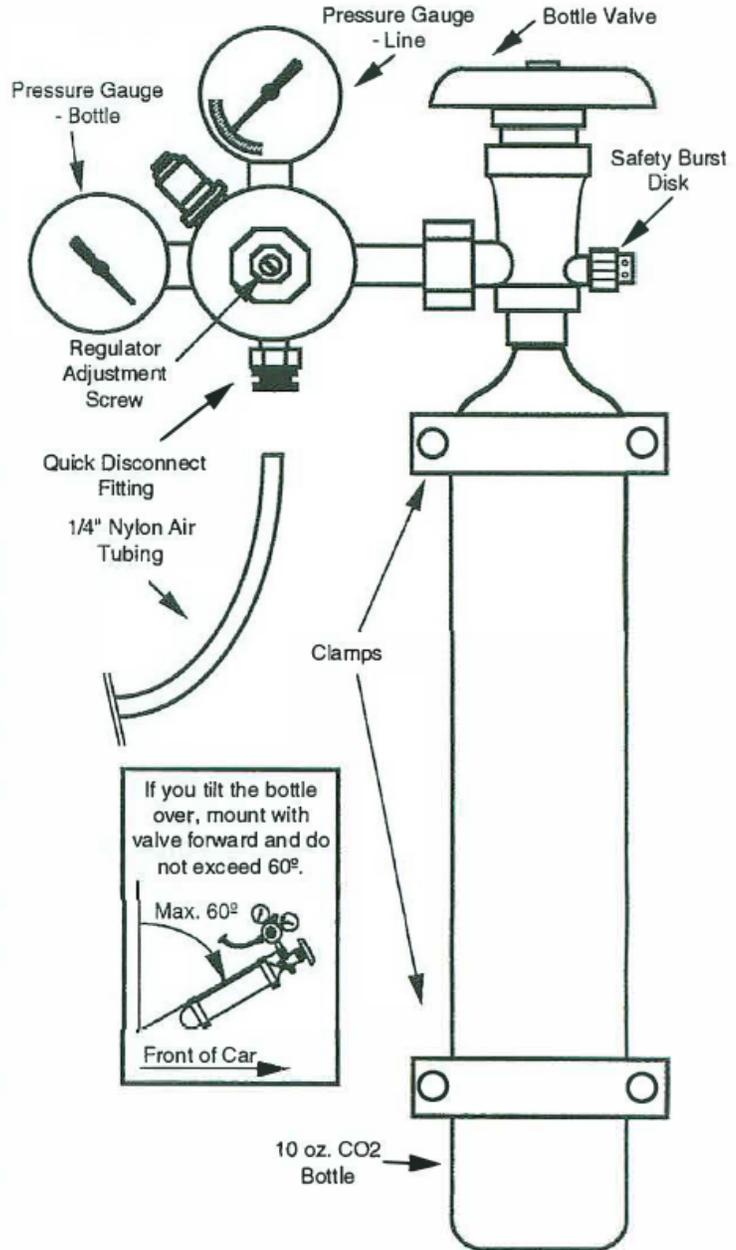

CO₂ BOTTLE IS D.O.T. APPROVED (DOT-E7737-1800
AND MEETS N.H.R.A. AND I.H.R.A. SPECS.

FOR SERVICE SEND TO: DEDENBEAR PRODUCTS, INC 413 W. Elm St. Sycamore, IL 60178 USA (866) 248-6357
Email: service@autometer.com
CUSTOMER SERVICE & TECH. SUPPORT: (866)248-6357 Mon-Fri 8am-5pm CST